

TWO OR MORE DWELLINGS ON A LOT AND RESIDENTIAL BUILDINGS

Purpose

To implement the State Planning Policy Framework and the Local Planning Policy Framework, including the Municipal Strategic Statement and local planning policies.

To achieve residential development that respects the existing neighbourhood character or which contributes to a preferred neighbourhood character.

To encourage residential development that provides reasonable standards of amenity for existing and new residents.

To encourage residential development that is responsive to the site and the neighbourhood.

Application

These provisions apply to an application to:

- Construct a dwelling if there is at least one dwelling existing on the lot,
- Construct two or more dwellings on a lot,
- Extend a dwelling if there are two or more dwellings on the lot,
- Construct or extend a dwelling on common property, or
- Construct or extend a residential building,

in the Residential 1 Zone, Residential 2 Zone, Residential 3 Zone, Mixed Use Zone and Township Zone.

These provisions do not apply to an application to construct or extend a development of four or more storeys, excluding a basement.

Operation

The provisions of this clause contain:

- **Objectives.** An objective describes the desired outcome to be achieved in the completed development.
- **Standards.** A standard contains the requirements to meet the objective.

A standard should normally be met. However, if the responsible authority is satisfied that an application for an alternative design solution meets the objective, the alternative design solution may be considered.
- **Decision guidelines.** The decision guidelines set out the matters that the responsible authority must consider before deciding if an application meets the objectives.

Requirements

A development:

- Must meet all of the objectives of this clause.
- Should meet all of the standards of this clause.

If the schedule to a zone specifies a requirement of a standard different from a requirement set out in this clause, the requirement in the schedule to the zone applies.

If the land is included in a Neighbourhood Character Overlay and a schedule to the overlay specifies a requirement of a standard different from a requirement set out in this clause or a

requirement in the schedule to a zone, the requirement in the schedule to the overlay applies.

If the land is included in an overlay, other than a Neighbourhood Character Overlay, and a schedule to the overlay specifies a requirement different from a requirement of a standard set out in this clause or a requirement of a standard set out in the schedule to a zone, the requirement in the overlay applies.

55.01

19/01/2006
VC37

NEIGHBOURHOOD AND SITE DESCRIPTION AND DESIGN RESPONSE

An application must be accompanied by:

- A neighbourhood and site description.
- A design response.

55.01-1

19/01/2006
VC37

Neighbourhood and site description

The neighbourhood and site description may use a site plan, photographs or other techniques and must accurately describe:

- In relation to the neighbourhood:
 - The pattern of development of the neighbourhood.
 - The built form, scale and character of surrounding development including front fencing.
 - Architectural and roof styles.
 - Any other notable features or characteristics of the neighbourhood.
- In relation to the site:
 - Site shape, size, orientation and easements.
 - Levels of the site and the difference in levels between the site and surrounding properties.
 - The location of existing buildings on the site and on surrounding properties, including the location and height of walls built to the boundary of the site.
 - The use of surrounding buildings.
 - The location of secluded private open space and habitable room windows of surrounding properties which have an outlook to the site within 9 metres.
 - Solar access to the site and to surrounding properties.
 - Location of significant trees existing on the site and any significant trees removed from the site 12 months prior to the application being made, where known.
 - Any contaminated soils and filled areas, where known.
 - Views to and from the site.
 - Street frontage features such as poles, street trees and kerb crossovers.
 - The location of local shops, public transport services and public open spaces within walking distance.
 - Any other notable features or characteristics of the site.

If in the opinion of the responsible authority a requirement of the neighbourhood and site description is not relevant to the evaluation of an application, the responsible authority may waive or reduce the requirement.

Satisfactory neighbourhood and site description

The responsible authority must inform the applicant in writing:

- Before notice of an application is given, or
- If notice of an application is not required to be given, before deciding the application,

that the neighbourhood and site description meets the requirements of Clause 55.01-1 and is satisfactory or does not meet the requirements of Clause 55.01-1 and is not satisfactory.

If the responsible authority decides that the neighbourhood and site description is not satisfactory, it may require more information from the applicant under Section 54 of the Act.

The responsible authority must not require notice of an application to be given or decide an application until it is satisfied that the neighbourhood and site description meets the requirements of Clause 55.01-1 and is satisfactory.

This does not apply if the responsible authority refuses an application under Section 52(1A) of the Act.

55.01-2

19/01/2006
VC37

Design response

The design response must explain how the proposed design:

- Derives from and responds to the neighbourhood and site description.
- Meets the objectives of Clause 55.
- Responds to any neighbourhood character features for the area identified in a local planning policy or a Neighbourhood Character Overlay.

The design response must include correctly proportioned street elevations or photographs showing the development in the context of adjacent buildings. If in the opinion of the responsible authority this requirement is not relevant to the evaluation of an application, it may waive or reduce the requirement.

55.02

19/01/2006
VC37

NEIGHBOURHOOD CHARACTER AND INFRASTRUCTURE

55.02-1

19/01/2006
VC37

Neighbourhood character objectives

To ensure that the design respects the existing neighbourhood character or contributes to a preferred neighbourhood character.

To ensure that development responds to the features of the site and the surrounding area.

Standard B1

The design response must be appropriate to the neighbourhood and the site.

The proposed design must respect the existing or preferred neighbourhood character and respond to the features of the site.

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- Any relevant neighbourhood character objective, policy or statement set out in this scheme.
- The neighbourhood and site description.
- The design response.

55.02-2

19/01/2006
VC37

Residential policy objectives

To ensure that residential development is provided in accordance with any policy for housing in the State Planning Policy Framework and the Local Planning Policy Framework, including the Municipal Strategic Statement and local planning policies.

To support medium densities in areas where development can take advantage of public transport and community infrastructure and services.

Standard B2

An application must be accompanied by a written statement to the satisfaction of the responsible authority that describes how the development is consistent with any relevant policy for housing in the State Planning Policy Framework and the Local Planning Policy Framework, including the Municipal Strategic Statement and local planning policies.

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- The State Planning Policy Framework and the Local Planning Policy Framework including the Municipal Strategic Statement and local planning policies.
- The design response.

55.02-3

19/01/2006
VC37

Dwelling diversity objective

To encourage a range of dwelling sizes and types in developments of ten or more dwellings.

Standard B3

Developments of ten or more dwellings should provide a range of dwelling sizes and types, including:

- Dwellings with a different number of bedrooms.
- At least one dwelling that contains a kitchen, bath or shower, and a toilet and wash basin at ground floor level.

55.02-4

19/01/2006
VC37

Infrastructure objectives

To ensure development is provided with appropriate utility services and infrastructure.

To ensure development does not unreasonably overload the capacity of utility services and infrastructure.

Standard B4

Development should be connected to reticulated services, including reticulated sewerage, drainage, electricity and gas, if available.

Development should not unreasonably exceed the capacity of utility services and infrastructure, including reticulated services and roads.

In areas where utility services or infrastructure have little or no spare capacity, developments should provide for the upgrading of or mitigation of the impact on services or infrastructure.

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- The capacity of the existing infrastructure.
- In the absence of reticulated sewerage, the capacity of the development to treat and retain all wastewater in accordance with the State Environment Protection Policy (Waters of Victoria) under the Environment Protection Act 1970.
- If the drainage system has little or no spare capacity, the capacity of the development to provide for stormwater drainage mitigation or upgrading of the local drainage system.

55.02-5

19/01/2006
VC37

Integration with the street objective

To integrate the layout of development with the street.

Standard B5

Developments should provide adequate vehicle and pedestrian links that maintain or enhance local accessibility.

Development should be oriented to front existing and proposed streets.

High fencing in front of dwellings should be avoided if practicable.

Development next to existing public open space should be laid out to complement the open space.

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- Any relevant neighbourhood character objective, policy or statement set out in this scheme.
- The design response.

55.0319/01/2006
VC37**SITE LAYOUT AND BUILDING MASSING****55.03-1**19/01/2006
VC37**Street setback objective**

To ensure that the setbacks of buildings from a street respect the existing or preferred neighbourhood character and make efficient use of the site.

Standard B6

Walls of buildings should be set back from streets:

- At least the distance specified in the schedule to the zone, or
- If no distance is specified in the schedule to the zone, the distance specified in Table B1.

Porches, pergolas and verandahs that are less than 3.6 metres high and eaves may encroach not more than 2.5 metres into the setbacks of this standard.

Table B1 Street setback

DEVELOPMENT CONTEXT	MINIMUM SETBACK FROM FRONT STREET (METRES)	MINIMUM SETBACK FROM A SIDE STREET (METRES)
There is an existing building on both the abutting allotments facing the same street, and the site is not on a corner.	The average distance of the setbacks of the front walls of the existing buildings on the abutting allotments facing the front street or 9 metres, whichever is the lesser.	Not applicable
There is an existing building on one abutting allotment facing the same street and no existing building on the other abutting allotment facing the same street, and the site is not on a corner.	The same distance as the setback of the front wall of the existing building on the abutting allotment facing the front street or 9 metres, whichever is the lesser.	Not applicable
There is no existing building on either of the abutting allotments facing the same street, and the site is not on a corner.	6 metres for streets in a Road Zone, Category 1, and 4 metres for other streets.	Not applicable

DEVELOPMENT CONTEXT	MINIMUM SETBACK FROM FRONT STREET (METRES)	MINIMUM SETBACK FROM A SIDE STREET (METRES)
The site is on a corner.	<p>If there is a building on the abutting allotment facing the front street, the same distance as the setback of the front wall of the existing building on the abutting allotment facing the front street or 9 metres, whichever is the lesser.</p> <p>If there is no building on the abutting allotment facing the front street, 6 metres for streets in a Road Zone, Category 1, and 4 metres for other streets.</p>	<p>Front walls of new development fronting the side street of a corner site should be setback at least the same distance as the setback of the front wall of any existing building on the abutting allotment facing the side street or 3 metres, whichever is the lesser.</p> <p>Side walls of new development on a corner site should be setback the same distance as the setback of the front wall of any existing building on the abutting allotment facing the side street or 2 metres, whichever is the lesser.</p>

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- Any relevant neighbourhood character objective, policy or statement set out in this scheme.
- The design response.
- Whether a different setback would be more appropriate taking into account the prevailing setbacks of existing buildings on nearby lots.
- The visual impact of the building when viewed from the street and from adjoining properties.
- The value of retaining vegetation within the front setback.

55.03-2

19/01/2006
VC37

Building height objective

To ensure that the height of buildings respects the existing or preferred neighbourhood character.

Standard B7

The maximum building height should not exceed the maximum height specified in the zone, schedule to the zone or an overlay that applies to the land.

If no maximum height is specified in the zone, schedule to the zone or an overlay, the maximum building height should not exceed 9 metres, unless the slope of the natural ground level at any cross section wider than 8 metres of the site of the building is 2.5 degrees or more, in which case the maximum building height should not exceed 10 metres.

Changes of building height between existing buildings and new buildings should be graduated.

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- Any relevant neighbourhood character objective, policy or statement set out in this scheme.
- The design response.
- The effect of the slope of the site on the height of the building.
- The relationship between the proposed building height and the height of existing adjacent buildings.
- The visual impact of the building when viewed from the street and from adjoining properties.

55.03-3

19/01/2006
VC37

Site coverage objective

To ensure that the site coverage respects the existing or preferred neighbourhood character and responds to the features of the site.

Standard B8

The site area covered by buildings should not exceed:

- The maximum site coverage specified in the schedule to the zone, or
- If no maximum site coverage is specified in the schedule to the zone, 60 per cent.

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- Any relevant neighbourhood character objective, policy or statement set out in this scheme.
- The design response.
- The existing site coverage and any constraints imposed by existing development or the features of the site.
- The site coverage of adjacent properties.
- The effect of the visual bulk of the building and whether this is acceptable in the neighbourhood.

55.03-4

19/01/2006
VC37

Permeability objectives

To reduce the impact of increased stormwater run-off on the drainage system.

To facilitate on-site stormwater infiltration.

Standard B9

At least 20 per cent of the site should not be covered by impervious surfaces.

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- The design response.
- The existing site coverage and any constraints imposed by existing development.
- The capacity of the drainage network to accommodate additional stormwater.
- The capacity of the site to absorb run-off.
- The practicality of achieving at least 20 per cent site coverage of pervious surfaces, particularly on lots of less than 300 square metres.

55.03-5

19/01/2006
VC37

Energy efficiency objectives

To achieve and protect energy efficient dwellings and residential buildings.

To ensure the orientation and layout of development reduce fossil fuel energy use and make appropriate use of daylight and solar energy.

Standard B10

Buildings should be:

- Oriented to make appropriate use of solar energy.
- Sited and designed to ensure that the energy efficiency of existing dwellings on adjoining lots is not unreasonably reduced.

Living areas and private open space should be located on the north side of the development, if practicable.

Developments should be designed so that solar access to north-facing windows is maximised.

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- The design response.
- The size, orientation and slope of the lot.
- The existing amount of solar access to abutting properties.
- The availability of solar access to north-facing windows on the site.

55.03-6

19/01/2006
VC37

Open space objective

To integrate the layout of development with any public and communal open space provided in or adjacent to the development.

Standard B11

If any public or communal open space is provided on site, it should:

- Be substantially fronted by dwellings, where appropriate.
- Provide outlook for as many dwellings as practicable.
- Be designed to protect any natural features on the site.
- Be accessible and useable.

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- Any relevant plan or policy for open space in the State Planning Policy Framework and Local Planning Policy Framework, including the Municipal Strategic Statement and local planning policies.
- The design response.

55.03-7

19/01/2006
VC37

Safety objective

To ensure the layout of development provides for the safety and security of residents and property.

Standard B12

Entrances to dwellings and residential buildings should not be obscured or isolated from the street and internal accessways.

Planting which creates unsafe spaces along streets and accessways should be avoided.

Developments should be designed to provide good lighting, visibility and surveillance of car parks and internal accessways.

Private spaces within developments should be protected from inappropriate use as public thoroughfares.

Decision guideline

Before deciding on an application, the responsible authority must consider the design response.

55.03-8

19/01/2006
VC37

Landscaping objectives

To encourage development that respects the landscape character of the neighbourhood.

To encourage development that maintains and enhances habitat for plants and animals in locations of habitat importance.

To provide appropriate landscaping.

To encourage the retention of mature vegetation on the site.

Standard B13

The landscape layout and design should:

- Protect any predominant landscape features of the neighbourhood.
- Take into account the soil type and drainage patterns of the site.
- Allow for intended vegetation growth and structural protection of buildings.
- In locations of habitat importance, maintain existing habitat and provide for new habitat for plants and animals.
- Provide a safe, attractive and functional environment for residents.

Development should provide for the retention or planting of trees, where these are part of the character of the neighbourhood.

Development should provide for the replacement of any significant trees that have been removed in the 12 months prior to the application being made.

The landscape design should specify landscape themes, vegetation (location and species), paving and lighting.

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- Any relevant neighbourhood character objective, policy or statement set out in this scheme.
- Any relevant plan or policy for landscape design in the State Planning Policy Framework and Local Planning Policy Framework, including the Municipal Strategic Statement and local planning policies.
- The design response.
- The location and size of gardens and the predominant plant types in the neighbourhood.
- The health of any trees to be removed.
- Whether a tree was removed to gain a development advantage.

55.03-9

19/01/2006
VC37

Access objectives

To ensure vehicle access to and from a development is safe, manageable and convenient.

To ensure the number and design of vehicle crossovers respects the neighbourhood character.

Standard B14

Accessways should:

- Be designed to allow convenient, safe and efficient vehicle movements and connections within the development and to the street network.
- Be designed to ensure vehicles can exit a development in a forwards direction if the accessway serves five or more car spaces, three or more dwellings, or connects to a road in a Road Zone.
- Be at least 3 metres wide.
- Have an internal radius of at least 4 metres at changes of direction.
- Provide a passing area at the entrance that is at least 5 metres wide and 7 metres long if the accessway serves ten or more spaces and connects to a road in a Road Zone.

The width of accessways or car spaces should not exceed:

- 33 per cent of the street frontage, or
- if the width of the street frontage is less than 20 metres, 40 per cent of the street frontage.

No more than one single-width crossover should be provided for each dwelling fronting a street.

The location of crossovers should maximise the retention of on-street car parking spaces.

The number of access points to a road in a Road Zone should be minimised.

Developments must provide for access for service, emergency and delivery vehicles.

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- The design response.
- The impact on the neighbourhood character.
- The practicality of providing car parking on the site, particularly for lots of less than 300 square metres.
- The reduction of on-street car parking spaces.
- Traffic flows in the street and the safety of motorists and pedestrians.
- The effect on any significant vegetation on the site and footpath.
- The efficient use of the site.
- For developments with accessways longer than 60 metres or serving more than 40 dwellings, the relevant standards of Clause 56.

55.03-10 Parking location objectives

19/01/2006
VC37

To provide convenient parking for resident and visitor vehicles.

To avoid parking and traffic difficulties in the development and the neighbourhood.

To protect residents from vehicular noise within developments.

Standard B15

Car parking facilities should:

- Be reasonably close and convenient to dwellings and residential buildings.
- Be secure.
- Be designed to allow safe and efficient movements within the development.
- Be well ventilated if enclosed.

Large parking areas should be broken up with trees, buildings or different surface treatments.

Shared accessways or car parks of other dwellings and residential buildings should be located at least 1.5 metres from the windows of habitable rooms. This setback may be reduced to 1 metre where there is a fence at least 1.5 metres high or where window sills are at least 1.4 metres above the accessway.

Decision guideline

Before deciding on an application, the responsible authority must consider the design response.

55.03-11 Parking provision objectives

19/01/2006
VC37

To ensure that car and bicycle parking for residents and visitors is appropriate to the needs of residents.

To ensure that the design of parking and access areas is practical and attractive and that these areas can be easily maintained.

Standard B16

Car parking for residents should be provided as follows:

- One space for each one or two bedroom dwelling.
- Two spaces for each three or more bedroom dwelling, with one space under cover.

Studies or studios that are separate rooms must be counted as bedrooms.

Developments of five or more dwellings should provide visitor car parking of one space for every five dwellings. The spaces should be clearly marked as visitor parking.

In developments of five or more dwellings, bicycle parking spaces should be provided.

Car spaces and accessways should have the minimum dimensions specified in Table B2.

Table B2 Car park and accessway dimensions

ANGLE OF CAR SPACES TO ACCESSWAY	ACCESSWAY WIDTH	CAR SPACE WIDTH	CAR SPACE LENGTH
Parallel	3.6 m	2.3 m	6.7 m
45°	3.5 m	2.6 m	4.9 m
60°	4.9 m	2.6 m	4.9 m
90°	6.4 m	2.6 m	4.9 m
	5.8 m	2.8 m	4.9 m
	5.2 m	3.0 m	4.9 m
	4.8 m	3.2 m	4.9 m

A building may project into the space if it is at least 2.1 metres above the space.

Car spaces in garages, carports or otherwise constrained by walls should be at least 6 metres long and 3.5 metres wide for a single space and 5.5 metres wide for a double space measured inside the garage or carport.

Car parking facilities should:

- Be designed for efficient use and management.
- Minimise the area of hard surface.
- Be designed, surfaced and graded to reduce run-off and allow stormwater to drain into the site.
- Be lit.

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- The reduction in the demand for on-site parking in rental housing, managed by not for profit organisations, intended for residents likely to have a low level of car ownership.
- The number, type and size of dwellings.
- The availability of public transport and on-street parking.

- The practicality of providing car parking on the site, particularly for lots of less than 300 square metres.
- The reduction of on-street car parking spaces associated with the provision of car parking on the site, particularly for lots of less than 300 square metres.
- Local traffic and parking management plans and safety considerations.
- Any relevant local planning policy or parking precinct plan.

55.04

19/01/2006
VC37

AMENITY IMPACTS

55.04-1

19/01/2006
VC37

Side and rear setbacks objective

To ensure that the height and setback of a building from a boundary respects the existing or preferred neighbourhood character and limits the impact on the amenity of existing dwellings.

Standard B17


A new building not on or within 150mm of a boundary should be set back from side or rear boundaries:

- At least the distance specified in the schedule to the zone, or
- If no distance is specified in the schedule to the zone, 1 metre, plus 0.3 metres for every metre of height over 3.6 metres up to 6.9 metres, plus 1 metre for every metre of height over 6.9 metres.

Sunblinds, verandahs, porches, eaves, fascias, gutters, masonry chimneys, flues, pipes, domestic fuel or water tanks, and heating or cooling equipment or other services may encroach not more than 0.5 metres into the setbacks of this standard.

Landings having an area of not more than 2 square metres and less than 1 metre high, stairways, ramps, pergolas, shade sails and carports may encroach into the setbacks of this standard.

Diagram B1 Side and rear setbacks

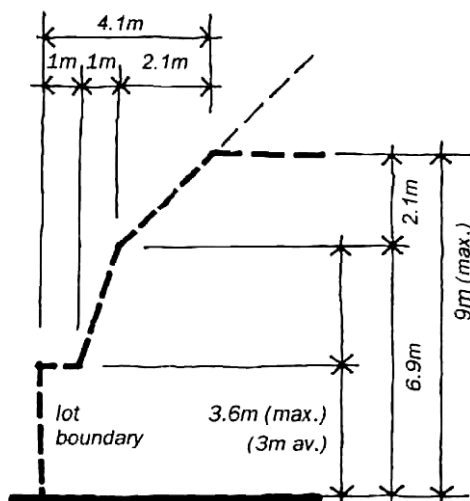

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- Any relevant neighbourhood character objective, policy or statement set out in this scheme.
- The design response.
- The impact on the amenity of the habitable room windows and secluded private open space of existing dwellings.

- Whether the wall is opposite an existing or simultaneously constructed wall built to the boundary.
- Whether the wall abuts a side or rear lane.

55.04-2

19/01/2006
VC37

Walls on boundaries objective

To ensure that the location, length and height of a wall on a boundary respects the existing or preferred neighbourhood character and limits the impact on the amenity of existing dwellings.

Standard B18

A new wall constructed on or within 150mm of a side or rear boundary of a lot or a carport constructed on or within 1 metre of a side or rear boundary of lot should not abut the boundary for a length of more than:

- 10 metres plus 25 per cent of the remaining length of the boundary of an adjoining lot, or
- Where there are existing or simultaneously constructed walls or carports abutting the boundary on an abutting lot, the length of the existing or simultaneously constructed walls or carports,

whichever is the greater.

A new wall or carport may fully abut a side or rear boundary where slope and retaining walls or fences would result in the effective height of the wall or carport being less than 2 metres on the abutting property boundary.

A building on a boundary includes a building set back up to 150mm from a boundary.

The height of a new wall constructed on or within 150mm of a side or rear boundary or a carport constructed on or within 1 metre of a side or rear boundary should not exceed an average of 3 metres with no part higher than 3.6 metres unless abutting a higher existing or simultaneously constructed wall.

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- Any relevant neighbourhood character objective, policy or statement set out in this scheme.
- The design response.
- The extent to which walls on boundaries are part of the neighbourhood character.
- The impact on the amenity of existing dwellings.
- The opportunity to minimise the length of walls on boundaries by aligning a new wall on a boundary with an existing wall on a lot of an adjoining property.
- The orientation of the boundary that the wall is being built on.
- The width of the lot.
- The extent to which the slope and retaining walls or fences reduce the effective height of the wall.
- Whether the wall abuts a side or rear lane.
- The need to increase the wall height to screen a box gutter.

Daylight to existing windows objective

To allow adequate daylight into existing habitable room windows.


Standard B19

Buildings opposite an existing habitable room window should provide for a light court to the existing window that has a minimum area of 3 square metres and minimum dimension of 1 metre clear to the sky. The calculation of the area may include land on the abutting lot.

Walls or carports more than 3 metres in height opposite an existing habitable room window should be set back from the window at least 50 per cent of the height of the new wall if the wall is within a 55 degree arc from the centre of the existing window. The arc may be swung to within 35 degrees of the plane of the wall containing the existing window.

Where the existing window is above ground floor level, the wall height is measured from the floor level of the room containing the window.

Diagram B2 Daylight to existing windows

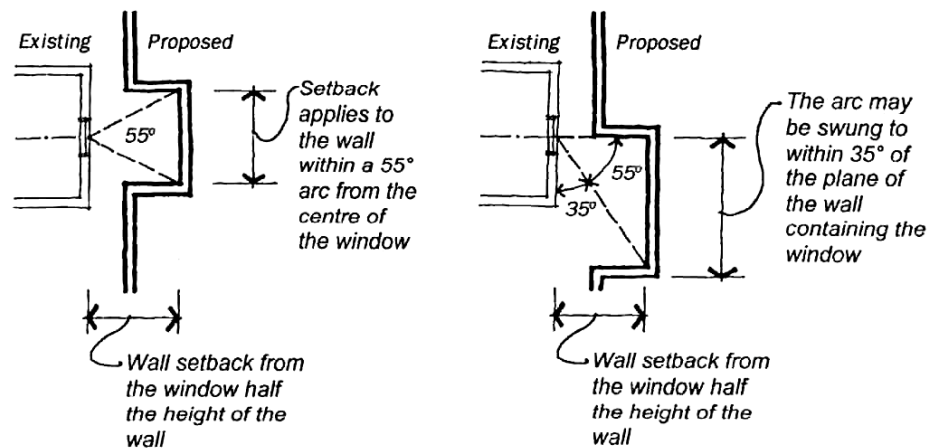

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- The design response.
- The extent to which the existing dwelling has provided for reasonable daylight access to its habitable rooms through the siting and orientation of its habitable room windows.
- The impact on the amenity of existing dwellings.

North-facing windows objective


To allow adequate solar access to existing north-facing habitable room windows.

Standard B20

If a north-facing habitable room window of an existing dwelling is within 3 metres of a boundary on an abutting lot, a building should be setback from the boundary 1 metre, plus 0.6 metres for every metre of height over 3.6 metres up to 6.9 metres, plus 1 metre for every metre of height over 6.9 metres, for a distance of 3 metres from the edge of each side

of the window. A north-facing window is a window with an axis perpendicular to its surface oriented north 20 degrees west to north 30 degrees east.

Diagram B3 North-facing windows

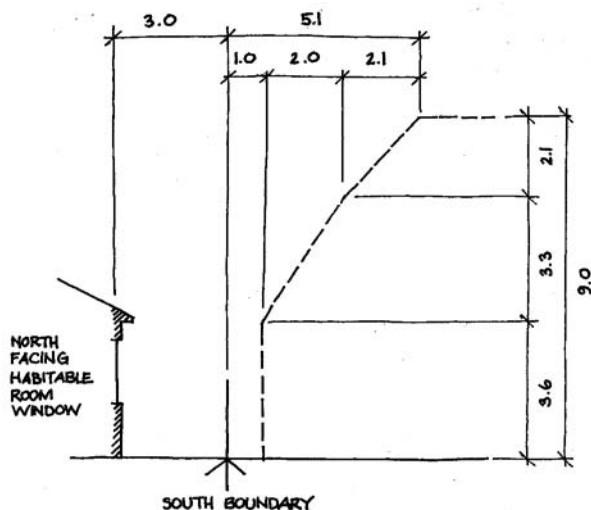

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- The design response.
- Existing sunlight to the north-facing habitable room window of the existing dwelling.
- The impact on the amenity of existing dwellings.

55.04-5
19/01/2006
VC37

Overshadowing open space objective

To ensure buildings do not significantly overshadow existing secluded private open space.

Standard B21

Where sunlight to the secluded private open space of an existing dwelling is reduced, at least 75 per cent, or 40 square metres with minimum dimension of 3 metres, whichever is the lesser area, of the secluded private open space should receive a minimum of five hours of sunlight between 9 am and 3 pm on 22 September.

If existing sunlight to the secluded private open space of an existing dwelling is less than the requirements of this standard, the amount of sunlight should not be further reduced.

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- The design response.
- The impact on the amenity of existing dwellings.
- Existing sunlight penetration to the secluded private open space of the existing dwelling.

- The time of day that sunlight will be available to the secluded private open space of the existing dwelling.
- The effect of a reduction in sunlight on the existing use of the existing secluded private open space.

55.04-6

19/01/2006
VC37

Overlooking objective

To limit views into existing secluded private open space and habitable room windows.

Standard B22

A habitable room window, balcony, terrace, deck or patio should be located and designed to avoid direct views into the secluded private open space of an existing dwelling within a horizontal distance of 9 metres (measured at ground level) of the window, balcony, terrace, deck or patio. Views should be measured within a 45 degree angle from the plane of the window or perimeter of the balcony, terrace, deck or patio, and from a height of 1.7 metres above floor level.

A habitable room window, balcony, terrace, deck or patio with a direct view into a habitable room window of existing dwelling within a horizontal distance of 9 metres (measured at ground level) of the window, balcony, terrace, deck or patio should be either:

- Offset a minimum of 1.5 metres from the edge of one window to the edge of the other.
- Have sill heights of at least 1.7 metres above floor level.
- Have fixed, obscure glazing in any part of the window below 1.7 metre above floor level.
- Have permanently fixed external screens to at least 1.7 metres above floor level and be no more than 25 per cent transparent.


Obscure glazing in any part of the window below 1.7 metres above floor level may be openable provided that there are no direct views as specified in this standard.

Screens used to obscure a view should be:

- Perforated panels or trellis with a maximum of 25 per cent openings or solid translucent panels.
- Permanent, fixed and durable.
- Designed and coloured to blend in with the development.

This standard does not apply to a new habitable room window, balcony, terrace, deck or patio which faces a property boundary where there is a visual barrier at least 1.8 metres high and the floor level of the habitable room, balcony, terrace, deck or patio is less than 0.8 metres above ground level at the boundary.

Diagram B4 Overlooking open space

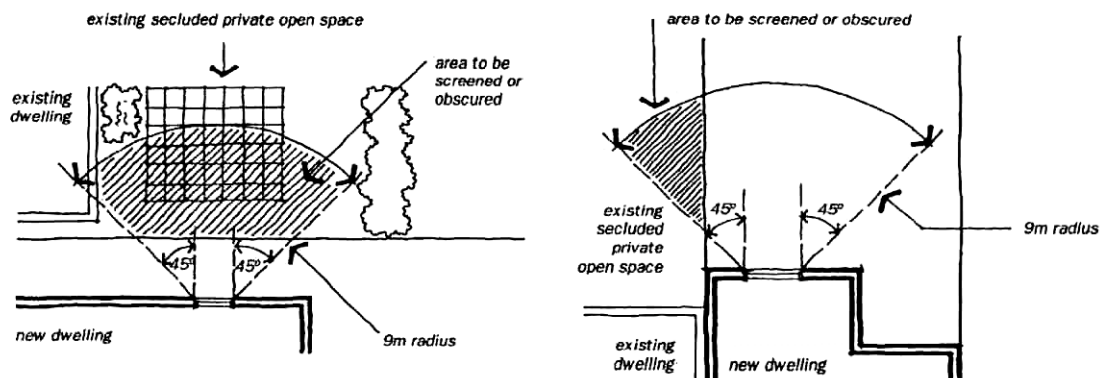

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- The design response.
- The impact on the amenity of the secluded private open space or habitable room window.
- The existing extent of overlooking into the secluded private open space and habitable room windows of existing dwellings.
- The internal daylight to and amenity of the proposed dwelling or residential building.

55.04-7

19/01/2006
VC37

Internal views objective

To limit views into the secluded private open space and habitable room windows of dwellings and residential buildings within a development.

Standard B23

Windows and balconies should be designed to prevent overlooking of more than 50 per cent of the secluded private open space of a lower-level dwelling or residential building directly below and within the same development.

Decision guideline

Before deciding on an application, the responsible authority must consider the design response.

55.04-8

19/01/2006
VC37

Noise impacts objectives

To contain noise sources in developments that may affect existing dwellings.

To protect residents from external noise.

Standard B24

Noise sources, such as mechanical plant, should not be located near bedrooms of immediately adjacent existing dwellings.

Noise sensitive rooms and secluded private open spaces of new dwellings and residential buildings should take account of noise sources on immediately adjacent properties.

Dwellings and residential buildings close to busy roads, railway lines or industry should be designed to limit noise levels in habitable rooms.

Decision guideline

Before deciding on an application, the responsible authority must consider the design response.

55.05 ON-SITE AMENITY AND FACILITIES

19/01/2006
VC37

55.05-1 Accessibility objective

19/01/2006
VC37

To encourage the consideration of the needs of people with limited mobility in the design of developments.

Standard B25

The dwelling entries of the ground floor of dwellings and residential buildings should be accessible or able to be easily made accessible to people with limited mobility.

55.05-2 Dwelling entry objective

19/01/2006
VC37

To provide each dwelling or residential building with its own sense of identity.

Standard B26

Entries to dwellings and residential buildings should:

- Be visible and easily identifiable from streets and other public areas.
- Provide shelter, a sense of personal address and a transitional space around the entry.

55.05-3 Daylight to new windows objective

19/01/2006
VC37

To allow adequate daylight into new habitable room windows.

Standard B27

A window in a habitable room should be located to face:

- An outdoor space clear to the sky or a light court with a minimum area of 3 square metres and minimum dimension of 1 metre clear to the sky, not including land on an abutting lot, or
- A verandah provided it is open for at least one third of its perimeter, or
- A carport provided it has two or more open sides and is open for at least one third of its perimeter.

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- The design response.
- Whether there are other windows in the habitable room which have access to daylight.

55.05-4 Private open space objective

19/01/2006
VC37

To provide adequate private open space for the reasonable recreation and service needs of residents.

Standard B28

A dwelling or residential building should have private open space of an area and dimensions specified in the schedule to the zone.

If no area or dimensions are specified in the schedule to the zone, a dwelling or residential building should have private open space consisting of:

- An area of 40 square metres, with one part of the private open space to consist of secluded private open space at the side or rear of the dwelling or residential building with a minimum area of 25 square metres, a minimum dimension of 3 metres and convenient access from a living room, or
- A balcony of 8 square metres with a minimum width of 1.6 metres and convenient access from a living room, or
- A roof-top area of 10 square metres with a minimum width of 2 metres and convenient access from a living room.

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- The design response.
- The useability of the private open space, including its size and accessibility.
- The availability of and access to public or communal open space.
- The orientation of the lot to the street and the sun.

55.05-5

19/01/2006
VC37

Solar access to open space objective


To allow solar access into the secluded private open space of new dwellings and residential buildings.

Standard B29

The private open space should be located on the north side of the dwelling or residential building, if appropriate.

The southern boundary of secluded private open space should be set back from any wall on the north of the space at least $(2 + 0.9h)$ metres, where 'h' is the height of the wall.

Diagram B5 Solar access to open space

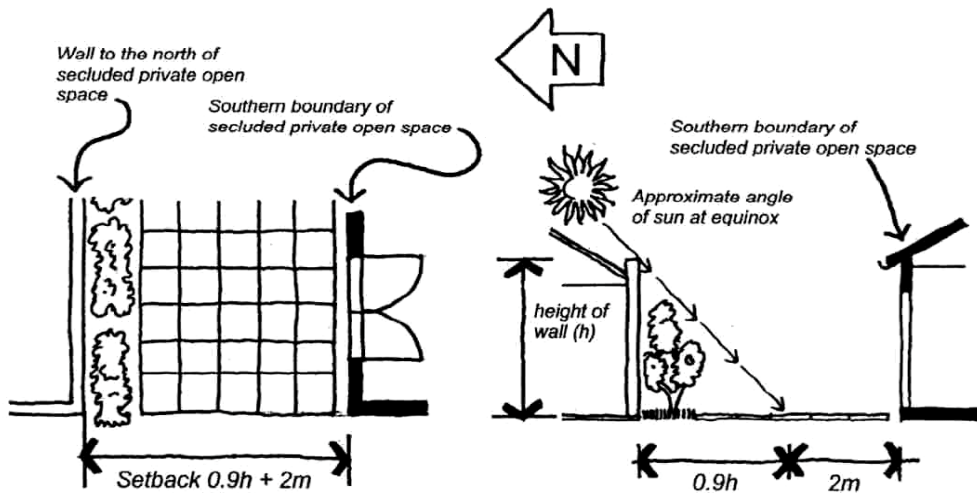

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- The design response.
- The useability and amenity of the secluded private open space based on the sunlight it will receive.

55.05-6

19/01/2006
VC37

Storage objective

To provide adequate storage facilities for each dwelling.

Standard B30

Each dwelling should have convenient access to at least 6 cubic metres of externally accessible, secure storage space.

55.06

19/01/2006
VC37

DETAILED DESIGN**55.06-1**

19/01/2006
VC37

Design detail objective

To encourage design detail that respects the existing or preferred neighbourhood character.

Standard B31

The design of buildings, including:

- Facade articulation and detailing,
- Window and door proportions,
- Roof form, and
- Verandahs, eaves and parapets,

should respect the existing or preferred neighbourhood character.

Garages and carports should be visually compatible with the development and the existing or preferred neighbourhood character.

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- Any relevant neighbourhood character objective, policy or statement set out in this scheme.
- The design response.
- The effect on the visual bulk of the building and whether this is acceptable in the neighbourhood setting.
- Whether the design is innovative and of a high architectural standard.

55.06-2

19/01/2006
VC37

Front fences objective

To encourage front fence design that respects the existing or preferred neighbourhood character.

Standard B32

The design of front fences should complement the design of the dwelling or residential building and any front fences on adjoining properties.

A front fence within 3 metres of a street should not exceed:

- The maximum height specified in the schedule to the zone, or
- If no maximum height is specified in the schedule to the zone, the maximum height specified in Table B3.

Table B3 Maximum front fence height

STREET CONTEXT	MAXIMUM FRONT FENCE HEIGHT
Streets in a Road Zone, Category 1	2 metres
Other streets	1.5 metres

Decision guidelines

Before deciding on an application, the responsible authority must consider:

- Any relevant neighbourhood character objective, policy or statement set out in this scheme.
- The design response.
- The setback, height and appearance of front fences on adjacent properties.
- The extent to which slope and retaining walls reduce the effective height of the front fence.
- Whether the fence is needed to minimise noise intrusion.

55.06-3

19/01/2006
VC37

Common property objectives

To ensure that communal open space, car parking, access areas and site facilities are practical, attractive and easily maintained.

To avoid future management difficulties in areas of common ownership.

Standard B33

Developments should clearly delineate public, communal and private areas.

Common property, where provided, should be functional and capable of efficient management.

55.06-4

19/01/2006
VC37

Site services objectives

To ensure that site services can be installed and easily maintained.

To ensure that site facilities are accessible, adequate and attractive.

Standard B34

The design and layout of dwellings and residential buildings should provide sufficient space (including easements where required) and facilities for services to be installed and maintained efficiently and economically.

Bin and recycling enclosures, mailboxes and other site facilities should be adequate in size, durable, waterproof and blend in with the development.

Bin and recycling enclosures should be located for convenient access by residents.

Mailboxes should be provided and located for convenient access as required by Australia Post.

Decision guideline

Before deciding on an application, the responsible authority must consider the design response.